


Titan Series



Multi-GNSS

Antenna

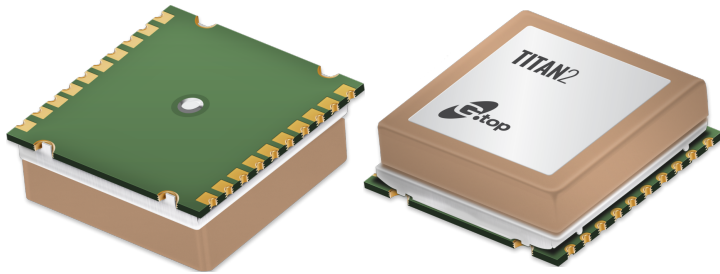

16 x 16 x 6.8 mm



Multi-GNSS
GPS/Glonass/
Beidou/Galileo/QZSS



Compact GNSS
Antenna Module



Ultra-low Power
Consumption



Comprehensive
FW Customization



High Positioning
Accuracy



EASY™ Technology
For Faster TTFF



Anti-Jamming
Technology



Reliable Quality
ROHS, CE, FCC

Titan 2

Multi-GNSS Patch Module

Product Description

Titan 2 is build based on MT3333 Multi-GNSS engine capable of achieving the high level of sensitivity (-165dBm) and instant Time-to-First Fix (TTFF). Titan 2 is a dual system GNSS receiver which acquires and tracks GPS/Glonass systems concurrently to provide high sensitivity and positioning capability.

Titan 2 has a well-tuned and optimized built-in Patch Antenna that offers excellent performance, and relieves the developer from Antenna integration. Power management design allows Titan 2 to be integrated easily into your system without extra voltage regulator. Titan 2 also allows direct battery connection without the need for an external LDO and gives customers plenty of choices for their application circuit.

Titan 2 includes features such as SBAS, Anti-Jamming, AlwaysLocate™, EASY™, EPO™, and logger function. Titan 2's Multi-GNSS capability makes it perfect for position and performance critical applications, such as Urban environment.

GlobalTop's industry leading free customization service further expands the capability of Titan 2 with unique features such as custom NMEA output sentence, distance calculation, geofencing, magnetic variation and last-position-retention, etc. Advanced users can also customize the basic parameters of the module ,including baud rate, update rate, internal logger settings, DGPS mode, 3D Fix, 1 PPS timing, and many more.

All modules are produced at GlobalTop's in-house ISO 9001:2008 certified manufacturing facility, with 100% unit testing and complete quality control, allowing for a consistent annual yield rate of 99.98%.

Highlights

Embedded Patch Antenna, 16 x 16 mm

Free and extensive firmware customization

Ultra-low tracking power consumption, 18 mA

Ultra-sensitive tracking, - 165 dBm

Built-in LNA, SAW-Filter, TCXO, RTC Crystal

GPS/QZSS, GLONASS and BEIDOU support, GALILEO-ready

Applications

Wearables

Personal, pet tracking

Fleet management

Vehicle, freight tracking

Automotive Telematics

Industrial PDA

Timing synchronization

UAV (unmanned air vehicles)

eCall / ERA-GIONASS systems

Smart watch, Digital cameras

Navigation devices




Avionics

Ordering Information

Part number	GMS-G6
Default Constellation	GPS / Glonass
Packaging	Tape on reel, 1500 pcs per reel
Evaluation Kit	GMS-G6-EVB-KIT
Firmware configurations	Standard Customized

To order samples and EVAL-Kits, please contact your local distributor.

Follow us :

 www.gtop-tech.com/linkedin
 www.gtop-tech.com/facebook
 www.gtop-tech.com/twitter

Titan 2

GPS/Glonass Module

Track with GlobalTop

Quality Innovation

Customization Longevity

Product Features

Receiver Type	MT3333 Engine			
Frequency Bands	GPS L1, GLONASS L1, QZSS L1 BEIDOU B1, GALILEO E1, SBAS L1			
Channels	Acquisition	Tracking	PRN	
	99	33	210	
DGPS (SBAS)	USA	EU	Japan	India
	WAAS	EGNOS	MSAS	GAGAN
Positioning Accuracy	Min	< 2.0 m		
	Typical	< 3.0 m		
	SBAS	< 2.5 m		
Velocity Accuracy	0.05 m/s (with SBAS) 0.10 m/s (without SBAS)			
Timing Accuracy (1 PPS)	±10 ns RMS (100 ms pulse-width)			
Maximum Altitude	50000 m (Default : 18000 m)			
Maximum Velocity	515 m/s (1000 Knots)			
Maximum Acceleration	4G			
Anti-Jamming	Active CW detection and removal 12 multi-tone interference canceller			
AGPS	EPO in flash™ 7 - 14 days ephemeris			
EASY™	Self-generated orbit prediction			
AlwaysLocate™	Intelligent periodic mode algorithm			
LOCUS™	Internal data logger, up to 16 hours at 15s intervals (default setting)			
Built-In Components	TCXO, RTC Crystal, Additional LNA SAW Filter, Embedded Flash			
External Antenna Interface	None			

Sensitivity

TTF (time-to-first-fix)	With EASY™	Without EASY™
Hot Start	1 Second	1 Second
Warm Start	5 Seconds	33 Seconds
Cold Start	15 Seconds	35 Seconds

Sensitivity

Tracking	- 165 dBm
Acquisition	- 148 dBm (Cold Start)
Re-acquisition	- 163 dBm (Hot Start)

Interfaces

Serial Interfaces	UART, RTCM
Max. Baud Rate	115200 bps (Default : 9600 bps)
Max. Update Rate	10 Hz (Default : 1 Hz)
Digital I/O	1 PPS
Protocols	NMEA standard NMEA Secure (binary, ASCII)


Legal Notice

GlobalTop reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. The information contained herein is provided "as is". No warranty, either express or implied, is made in relation to the accuracy, reliability and fitness for a particular purpose or content of this document. This document may be revised by GlobalTop at any time. For most recent documents, visit www.gtop-tech.com.

Copyright © 2016, GlobalTop Technology Inc.

Dimensions

20-Pin LCC Package	16 x 16 x 6.8 mm
Weight	5.6 g
Pinout	

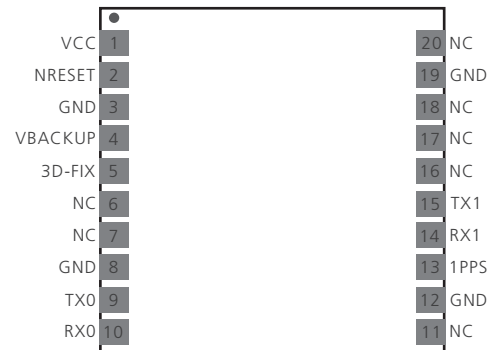

Electrical Data

Supply Voltage	3.0 V to 4.3 V (Typical 3.3 V)			
Backup Supply	2.0 V to 4.3 V (Typical 3.0 V)			
Power Consumption	Minimum	Typical	Maximum	
	Acquisition	20 mA	25 mA	30 mA
	Power Tracking	18 mA	23 mA	28 mA
	(GLP) Low Power Tracking	TBA		
Power Saving (Periodic)				
	Backup Mode	9 µA (Typical)		
	Standby Mode	350 µA (Typical)		

Environmental Data and Approvals

Operating Temperature	- 40°C to 85°C
Storage Temperature	- 40°C to 85°C
Approvals and Compliance	CE, FCC, ROHS, REACH, E911
Manufactured at an ISO 9001:2008 certified facility	

Free Firmware Customization

Basic Functions	Advanced Functions
Default baud-rate	NMEA Secure (ASCII, Binary)
NMEA sentence interval	Custom NMEA output
Datum (222 selections)	Last position retention
DGPS mode	Magnetic variation
Update rate	Geofencing
Data digits after decimal	Distance calculation
3D Fix settings	Navigation mode
1 PPS duration, output	Advanced altitude
Active interference canceller	Data-logger customization



GlobalTop Technology Inc.
No. 16, Nan-Ke 9th Road, Science-based Industrial Park,
Tainan 741, Taiwan

Contact us :

Email sales@gtop-tech.com
Tel +886 6 5051268
Fax +886 6 5053381

Follow us :

www.gtop-tech.com/linkedin
www.gtop-tech.com/facebook
www.gtop-tech.com/twitter

www.gtop-tech.com